

2400 Jinko JKM310P-72 Solar Panels (310W ea) = 96 Pallets (Rated capacity of system = 744 KW)

18 SolarEdge Inverters and 1192 Power Optimizers

Panelclaw Roof structures panel framing = 11 pallets

Various AXIAL racking framing for fixed and tracker panel configurations

Pull boxes, (1) EFAPower EV charger and misc. monitoring devices

Schweitzer Engineering – Generator Protection Relay

Various Square D Switchgear and breakers

Original Array Configuration consisted of:

- 678 ballasted roof panels
- 285 ground-mounted tracker panels
- 1440 fixed ground-mounted panels

EAGLE 72

310-330 Watt

POLYCRYSTALLINE MODULE

*1500V Available

Positive power tolerance of 0/+3%



KEY FEATURES



High Voltage

1000V standard; 1500V option lowers BOS costs and yields better LCOE



Innovative Solar Cells

Four busbar cell technology improves module efficiency



PID-Free

World's 1st PID-Free module at 85°C/85%RH



Low-Light Performance

New glass technology improves light absorption and retention



Strength and Durability

Certified for high snow (5400Pa) and wind (2400Pa) loads



Weather Resistance

Certified for salt mist and ammonia resistance

- ISO9001:2008 Quality Standards
- ISO14001:2004 Environmental Standards
- OHSAS18001 Occupational Health & Safety Standards

Nomenclature:


JKM320PP - 72 -

Code	Certification
null	1000V
V	1500V




LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

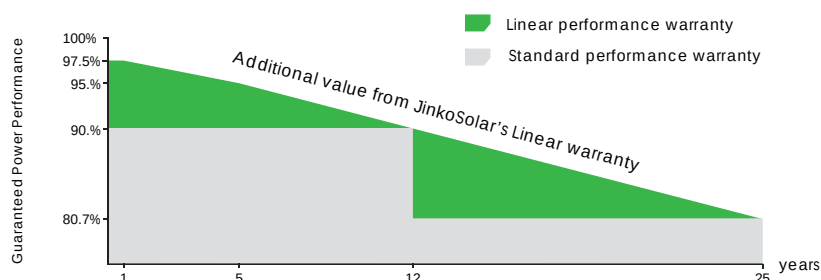

Engineering Drawings

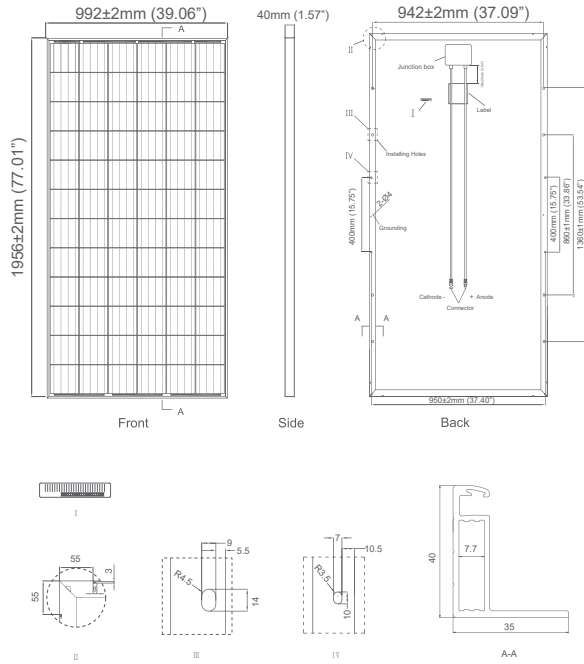


Packaging Configuration

(Two boxes =One pallet)

25pcs/ box, 50pcs/pallet, 600pcs/40'HQ Container

Electrical Performance & Temperature Dependence

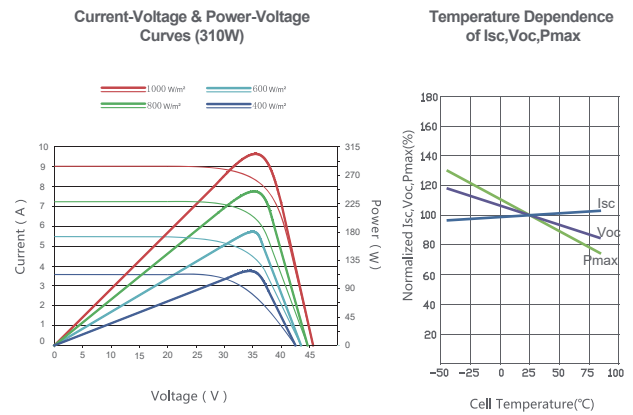

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (64.97×39.06×1.57 inch)
Weight	26.5 kg (58.4 lbs.)
Front Glass	4.0mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	12 AWG, Length:1200mm (47.24 inch)
Fire Type	Type 1

SPECIFICATIONS

Module Type	JKM310PP-V		JKM315PP-V		JKM320PP-V		JKM325PP-V		JKM330PP-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	310Wp	231Wp	315Wp	235Wp	320Wp	238Wp	325Wp	242Wp	330Wp	246Wp
Maximum Power Voltage (Vmp)	37.0V	33.9V	37.2V	34.3V	37.4V	34.7V	37.6V	35.0V	37.8V	35.3V
Maximum Power Current (Imp)	8.38A	6.81A	8.48A	6.84A	8.56A	6.86A	8.66A	6.91A	8.74A	6.97A
Open-circuit Voltage (Voc)	45.9V	42.7V	46.2V	43.2V	46.4V	43.7V	46.7V	44.0V	46.9V	44.2V
Short-circuit Current (Isc)	8.96A	7.26A	9.01A	7.29A	9.05A	7.30A	9.1A	7.34A	9.14A	7.38A
Module Efficiency STC (%)	15.98%		16.23%		16.49%		16.75%		17.01%	
Operating Temperature(°C)	-40°C~-+85°C									
Maximum system voltage	1500VDC (UL)									
Maximum series fuse rating	15A									
Power tolerance	0~-+3%									
Temperature coefficients of Pmax	-0.40%/°C									
Temperature coefficients of Voc	-0.30%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									


STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5


NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
© Jinko Solar Co., Ltd. All rights reserved specifications included in this datasheet are subject to change without notice.
US-MKT-330PP-V_v1.0_rev2016

DIMENSIONES EN PLANTA: 39,84 x 3,10 m
RANGO DE INCLINACIÓN: +40°
DIMENSION DE MÓDULOS: 1950x990 mm
NÚMERO DE MÓDULOS: 60
POTENCIA MÓDULOS: 350 W
POTENCIA POR EJE: 21 kW

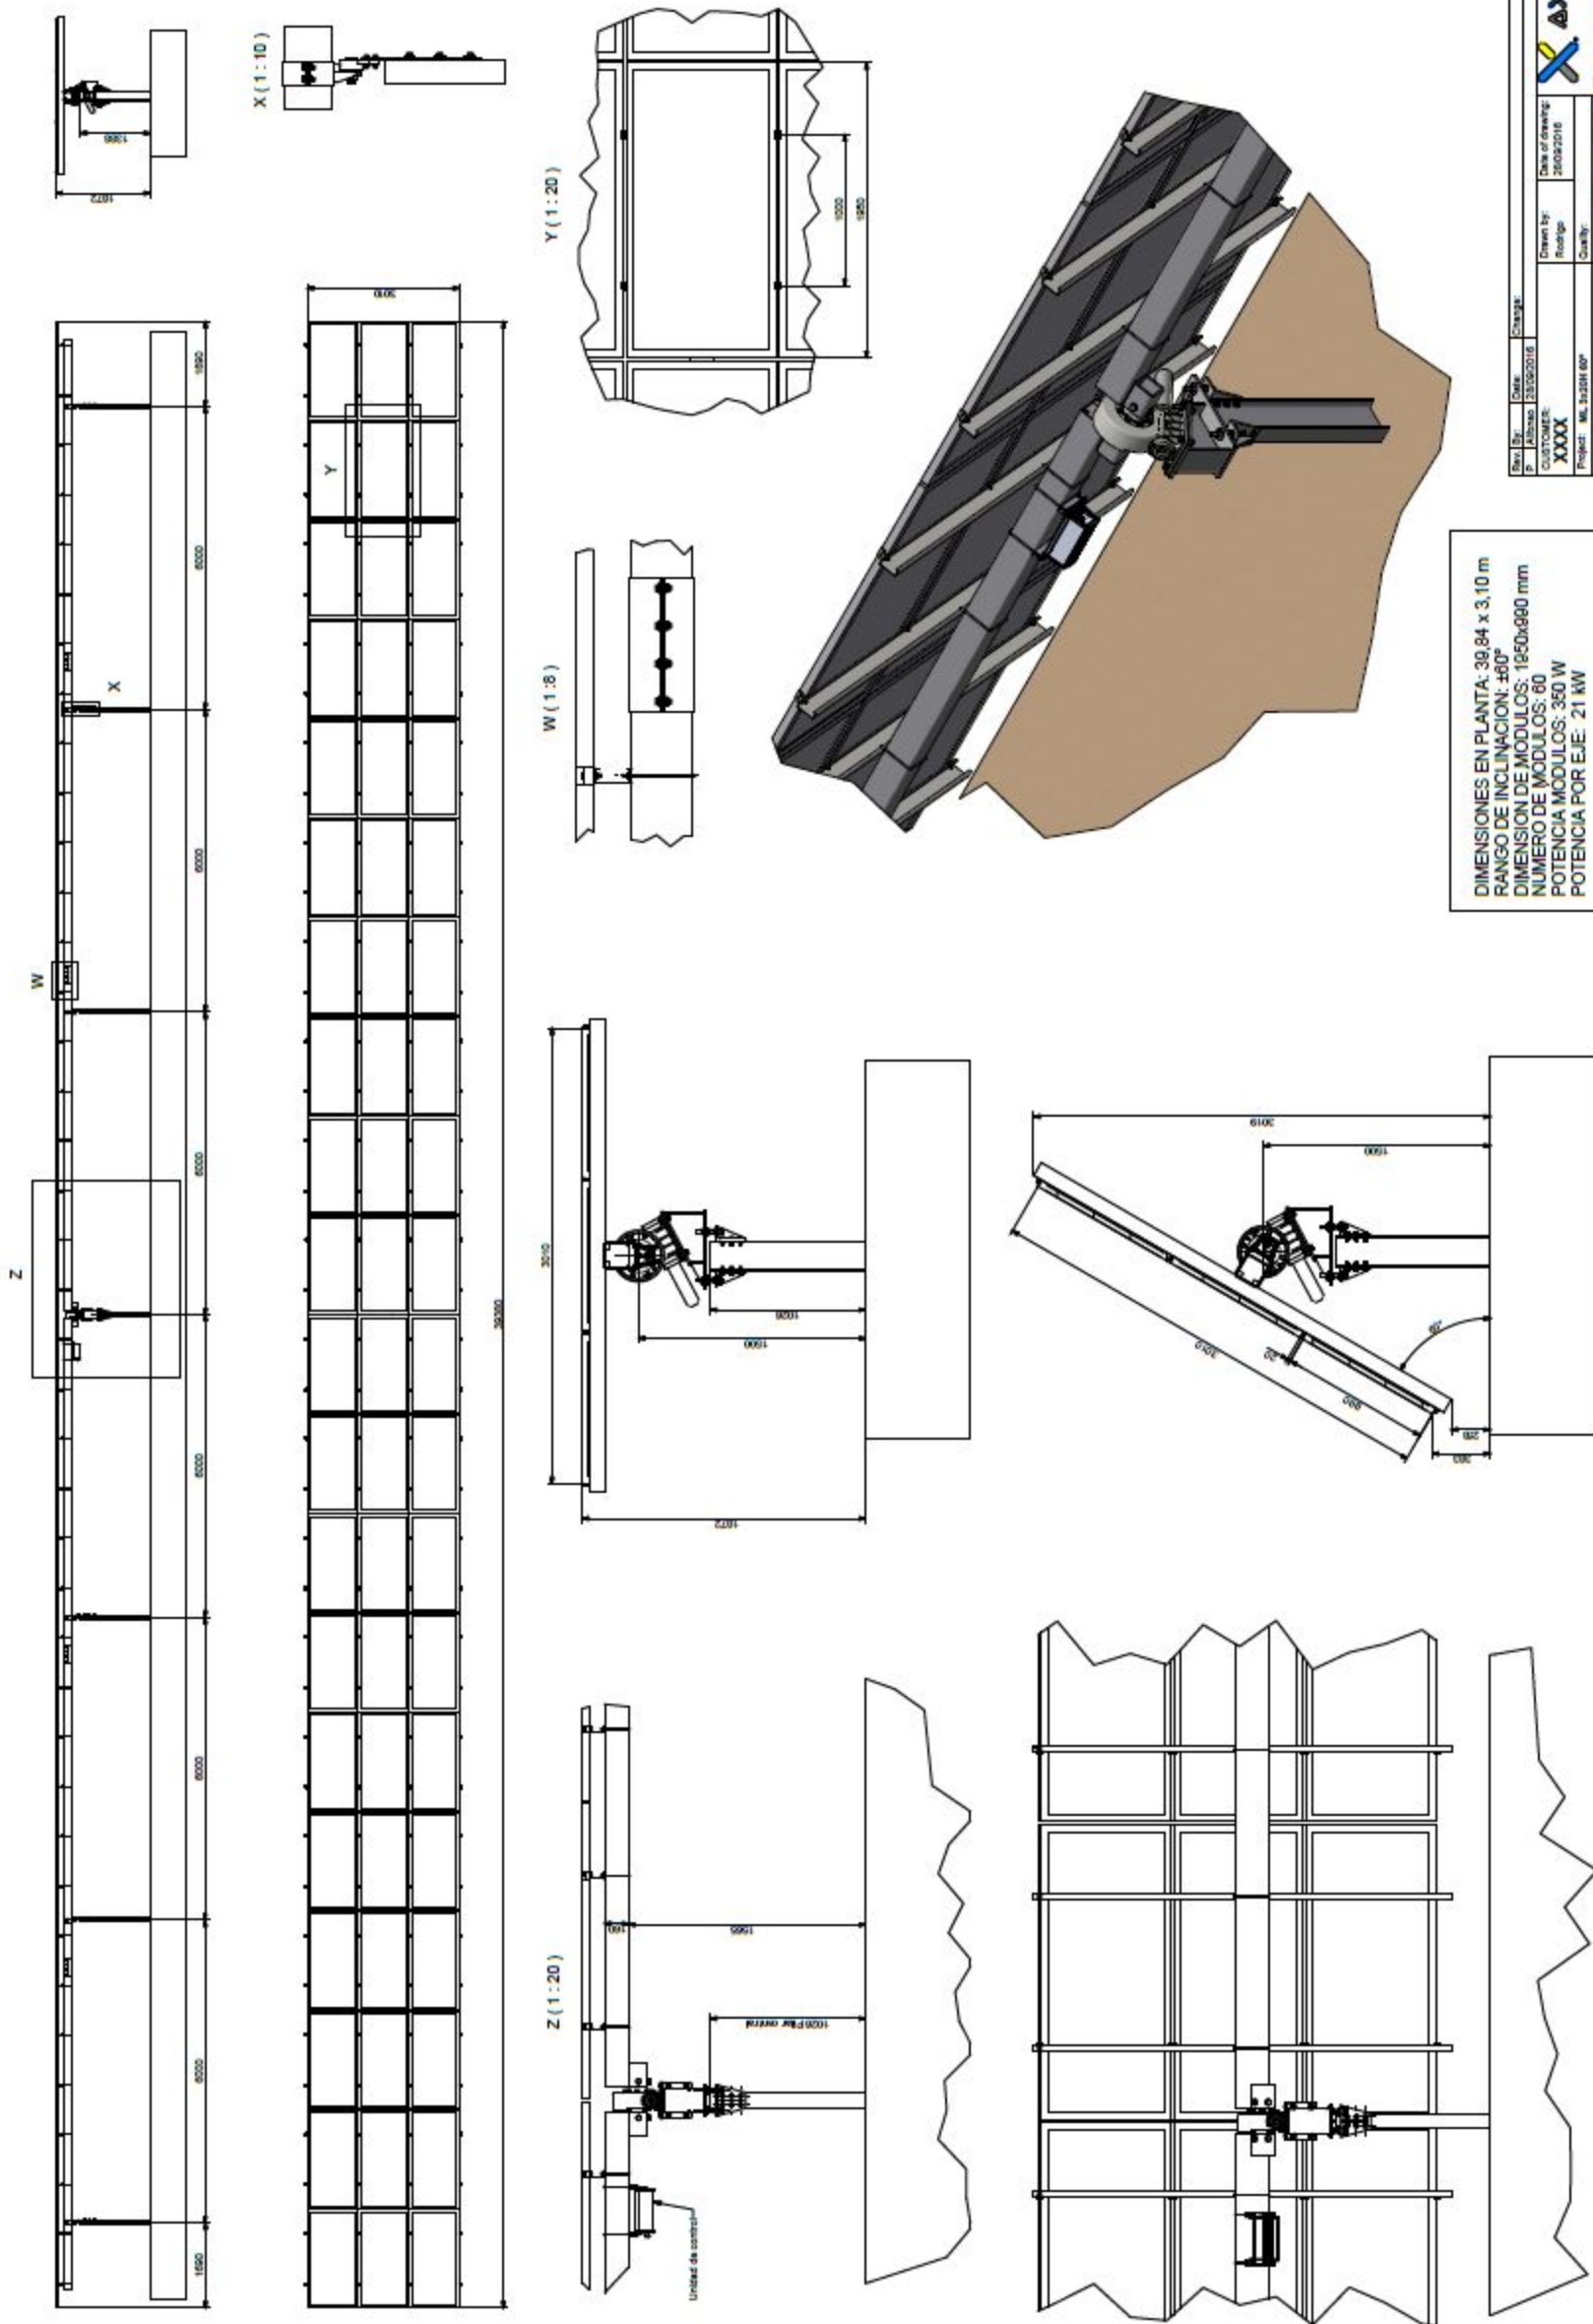

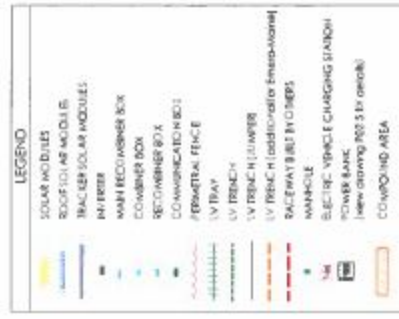

Q1	1.50E+17	CO2-fragments	no. frag. of
Q2	2.0E+16	uran-235 frag.	uran-235
Q3	1.10E+16	uran-235 frag.	uran-235
Q4	1.10E+16	uran-235 frag.	uran-235
Q5	1.10E+16	uran-235 frag.	uran-235



Project 1					
Subject					
Grade/Level					
Duration					
Objectives					
Materials					
Procedures					
Assessment					
Reflection					

TRACKER STRUCTURE DETAIL
MTC

CRACKING STRUCTURE DETAIL

ROOF PANELS DETAIL 1:15

AREA	INSTRUM	MOD	ADJUST	POWER
		(dBm)	(dB)	(dBm)
AREA 1	9		0°	82.450Wp
AREA 2	4	576	90°	171.541Wp
AREA 3	7	218	0°	46.900Wp
AREA 4 (HCO II)	5	478	30°	231.317Wp
TOTAL	18	3,384		730.208Wp



